


**NOTES:**


△ — TO TERMINAL 3 (MULTI-BURNER).  
NOT USED IN SINGLE BURNER.

\* — TO PIN-6 FLAME RELAY (SINGLE BURNER).  
TO PIN-4 LOAD RELAY (MULTI-BURNER).

THIS CONTACT BLOCK  
USED ON MULTI-BURNER  
CONTROL ONLY. NOT USED  
ON SINGLE BURNER CONTROL.

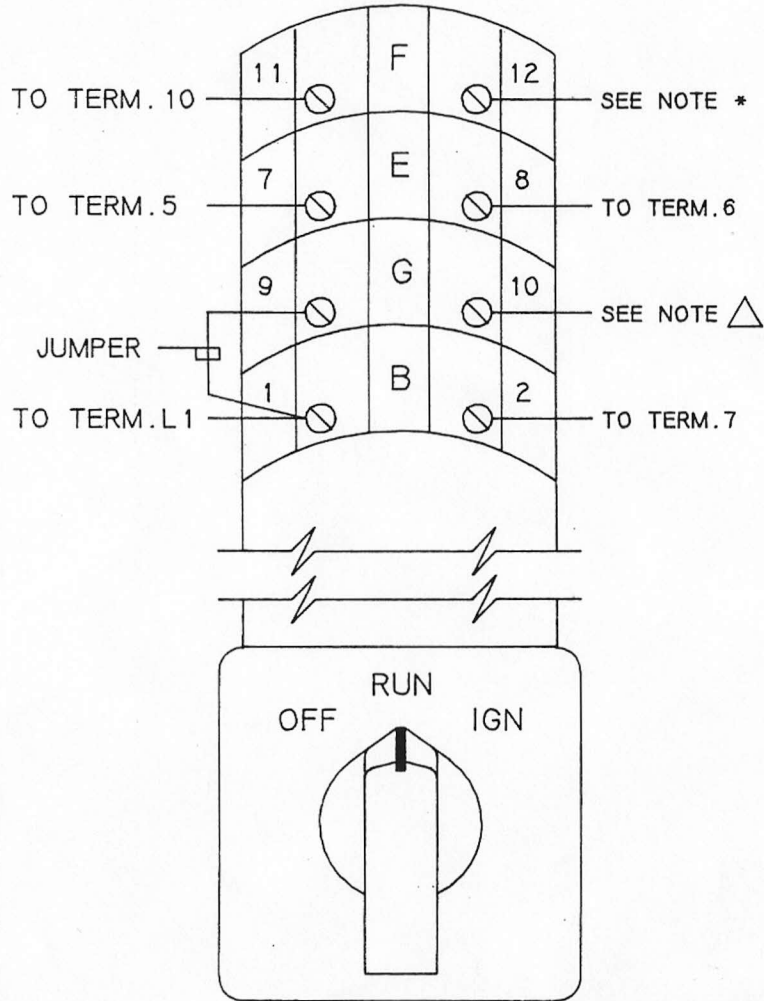

SWITCH NO. V2N4T911-UL  
THREE POSITION OPERATOR  
SPRING RETURN FROM  
RIGHT TO CENTER.

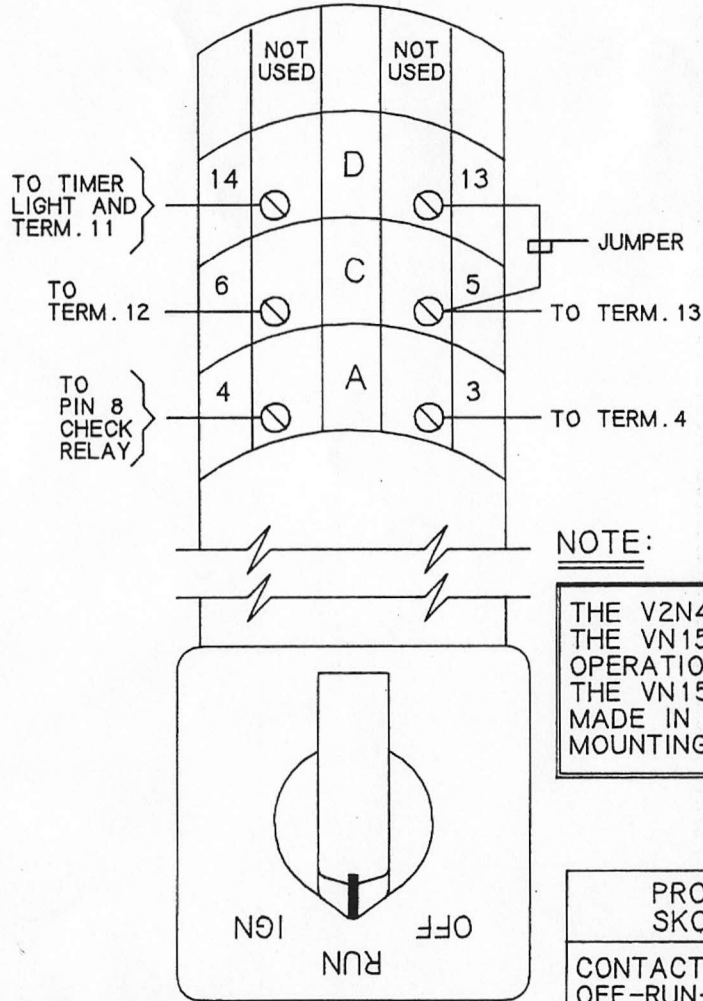

**NOTE:**

THE V2N4T911-UL SWITCH SUPERSEDES  
THE VN154T911-UL AND IS IDENTICAL IN  
OPERATION. IF IT IS USED TO REPLACE  
THE VN154T911-UL, A NOTCH MUST BE  
MADE IN THE TOP OF THE EXISTING  
MOUNTING HOLE TO PREVENT ROTATION.

3 POS. SEL. SW. SPRING RETURN FROM RIGHT TO CENTER			
	OFF	RUN	IGN.
CONTACT BLOCK	OPERATION		
B	O	X	X
C	O	O	X
G	X	X	O
D	X	X	O
A	O	X	X
E	O	O	X
F	X	X	O

PROTECTION CONTROLS INC.  
SKOKIE, ILLINOIS

CONTACT CONFIGURATION FOR V2N4T911-UL  
OFF-RUN-IGNITION SWITCH AS USED ON  
UNIFIED CONTROL PANEL NO. 62021

JOB NO.	DRAWN BY	DATE:	DRAWING NO.
	R.N.	9-21-01	X-375